



- Redundant fieldbus power for Foundation™ fieldbus cards
- Flexible N+1 redundancy
- Low lifetime costs
- Low capital cost whilst supporting future expansion
- Fully isolated
- Hot swappable power modules\*
- Low power dissipation
- On-line diagnostics option
- Pluggable trunk surge protection option



The 9189 fieldbus power system is designed to provide redundant power for eight, or four, Foundation™ fieldbus H1 segments for use with all fieldbus systems. It is optimised for use in general purpose and hazardous area High Energy Trunk architectures which, with the appropriate FieldPlus wiring components, supports fieldbus devices using all hazardous area protection techniques. The power supply has been designed to optimise cabinet layouts, maximising the number of fieldbus segments powered per cabinet while providing space for installing and maintaining cable connections and minimising the operating temperature.

Power for the fieldbus segments is provided by two groups of up to three 919x-FP 4-segment power modules, operating in N+1 redundant configuration (load sharing). For redundant applications requiring 250 to 500mA current per segment, three 9191-FP power modules are fitted on the carrier for each 4 segment group. For redundant applications, initially requiring up to 250mA current per segment, two 9191-FP modules are fitted on the carrier, with the option of adding a third power module to

allow for future segment expansion. Failure alarms and galvanic isolation are incorporated into each 919x-FP module. Passive inductors and terminators on each fieldbus segment deliver the highest level of availability.

Each 919x-FP module monitors the output of the four fieldbus segments and indicates an alarm (by means of a built-in, normally-closed relay) if any of the segments is shorted, or its output is below the minimum output voltage threshold. Failure of either of the bulk power input supplies is also announced. The alarm contacts are volt-free and galvanically isolated from other circuitry. Connections to the alarm relays are made via terminals on the 9189-CA-Px carrier; a separate alarm module is not required for this function. LED indicators show the status of each 919x-FP module and that of the four individual segments. In normal operation each segment LED is lit, showing that the segment is powered. If a segment is shorted, this LED is extinguished, and the module Alarm LED is lit.

The 919x-FP module provides galvanic isolation between the 24V DC input power and the fieldbus segments, as required by

the IEC61158-2 fieldbus standard and the Fieldbus Foundation™ FF-831 validation test for power supplies. There is also galvanic isolation between the fieldbus segments, thereby preventing multiple segment failures due to ground faults on more than one segment.

A separate physical layer diagnostics module may be installed on the carrier to automatically collect and distribute additional diagnostic information for each of the eight fieldbus segments. For more information see the F809F product specification.

Pluggable surge-protection components for each fieldbus trunk are available as an option reducing the installed cost of providing surge protection on fieldbus networks.

Redundant 24V DC (nom.) input power is connected to the 9189-CA-Px carrier using two-part pluggable connectors. Field wiring connections are available with either pluggable screw terminals (9189-CA-PS) or pluggable spring clamp terminals (9189-CA-PC). The pluggable connections are screw-retained providing a reliable connection in an industrial environment.

\* Gas clearance certificate required in Zone 2/Division 2 hazardous areas

## SPECIFICATION

**Location of equipment**  
Safe area,  
Class I Div 2 Groups ABCD T4 or  
Class I Zone 2 IIC T4 †

<b>OUTPUT</b>	<b>9191-FP</b>
<b>Number of channels</b>	Four (4)
<b>Voltage (DC)</b>	28.0 - 32.0V
<b>Design current (per segment)</b>	0 to 250mA
<b>Current limit</b>	>320mA
<b>Minimum load</b>	0mA

### 9189 SYSTEM

<b>Input voltage (DC)</b>	19.2 - 30.0V
<b>Isolation</b>	
<b>Fieldbus to input power</b>	500V AC rms withstand ‡
<b>Segment to segment</b>	850V DC withstand

‡ in accordance with FF-831

	<b>9189-61-P*</b>	<b>9189-91-P*</b>
<b>Current consumption</b> (24V input, all outputs fully loaded)	2.9A	5.7A
<b>Power dissipation/segment</b> (24V input, all outputs fully loaded)	1.3W	2.5W
<b>Number of channels</b>	Eight (8)	Eight (8)
<b>Voltage (DC)</b>	As module	As module
<b>Design current (per segment)</b>	0 to 250mA	0 to 500mA

	<b>9189-21-P*</b>	<b>9189-41-P*</b>
<b>Current consumption</b> (24V input, all outputs fully loaded)	1.5A	2.9A
<b>Power dissipation/segment</b> (24V input, all outputs fully loaded)	1.3W	2.5W
<b>Number of channels</b>	Four (4)	Four (4)
<b>Voltage (DC)</b>	As module	As module
<b>Design current (per segment)</b>	0 to 250mA	0 to 500mA

## ALARMS

**Alarm contact rating**  
1A maximum @ 30V DC maximum

**Alarm contact status**  
Normally closed

<b>Alarm threshold</b>	<b>9191-FP</b>
Segment output	<16V

## CONNECTIONS

### ELECTRICAL CONNECTIONS

**System & optional Diagnostics segment terminals**  
3-way fixed screw terminal connector 0.14 to 2.5 mm<sup>2</sup>

**Field & Power terminals**  
Pluggable rising cage-clamp screw terminals (-PS)  
Conductor size: 0.14 to 2.5 mm<sup>2</sup>  
Pluggable spring-clamp screw terminals (-PC)  
Conductor size: 0.2 to 2.5 mm<sup>2</sup>

**Alarm & ground terminals**  
2-way fixed screw terminal connector 0.14 to 2.5 mm<sup>2</sup>

### Cable screen ground connections

User-selectable jumper for segment shields: isolated (default) or interconnected and ground connection

### Terminators

A single termination is provided on each segment

† certificate pending

## ENVIRONMENTAL

**Ambient temperature - operating**  
-20°C to +60°C (optimum orientation)  
-20°C to +50°C (non-optimum orientation)

**Ambient temperature - storage**  
-40°C to +85°C

**Relative Humidity**  
< 95%, non-condensing

**Ingress protection**  
IP20 to BS EN 60529 (Additional protection by means of enclosure)

## MECHANICAL

**Dimensions**  
See following page

**Mounting method**

- Integrated fixings for 'Top hat' DIN rail, 35mm x 7.5mm to EN50022
- Four-hole surface mount - M4

**Weights**

9191-FP	0.2kg
9189-CA-P*	1.1kg

## ELECTRICAL

**EMC Compliance**  
To EN61326:2006 Electrical equipment for measurement, control and laboratory use - EMC requirements

## PHYSICAL NETWORKS

IEC61158-2  
ISA-S50.02 Part 2-1992  
Foundation™ fieldbus H1  
Profibus PA

## ORDERING INFORMATION

PART NO	DESCRIPTION
9189-CA-P*	Carrier, unpopulated
9191-FP	4-segment power module: 28V, 250mA
9197-BLK	Alarm blanking module <i>(used in any empty power module position to defeat the carrier alarm)</i>
9189-21-P*	4 segment system with 9189-CA-P* carrier, 2 x 9191-FP and 4 x 9197-BLK
9189-41-P*	4 segment system with 9189-CA-P* carrier, 3 x 9191-FP and 3 x 9197-BLK
9189-61-P*	8 segment system with 9189-CA-P* carrier, 4 x 9191-FP and 2 x 9197-BLK
9189-91-P*	8 segment system with 9189-CA-P* carrier and 6 x 9191-FP
F809F	Fieldbus diagnostic module

\* = S or C

S = Pluggable Screw Terminal Connectors

C = Pluggable Spring Clamp Connectors

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.





EUROPE (EMEA): +44 (0)1582 723633  
enquiry@mtl-inst.com

THE AMERICAS: +1 800 835 7075  
csinfo@mtl-inst.com

ASIA-PACIFIC: +65 6 645-9888  
sales.mtlsing@cooperindustries.com

EPS 9189-FB Rev-2 021211

# DIMENSION DRAWING

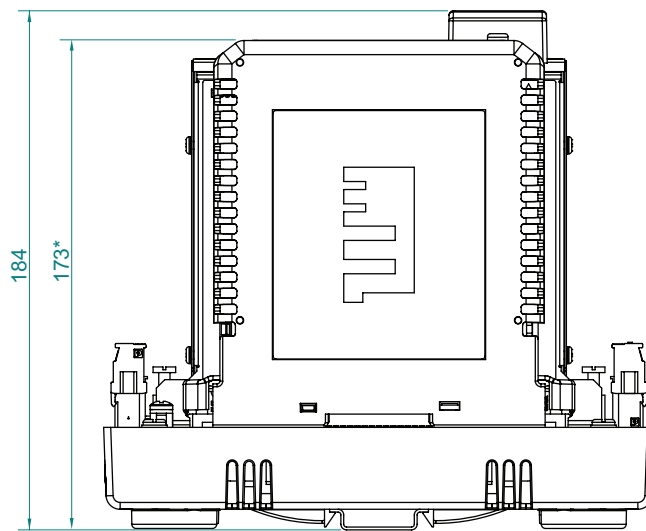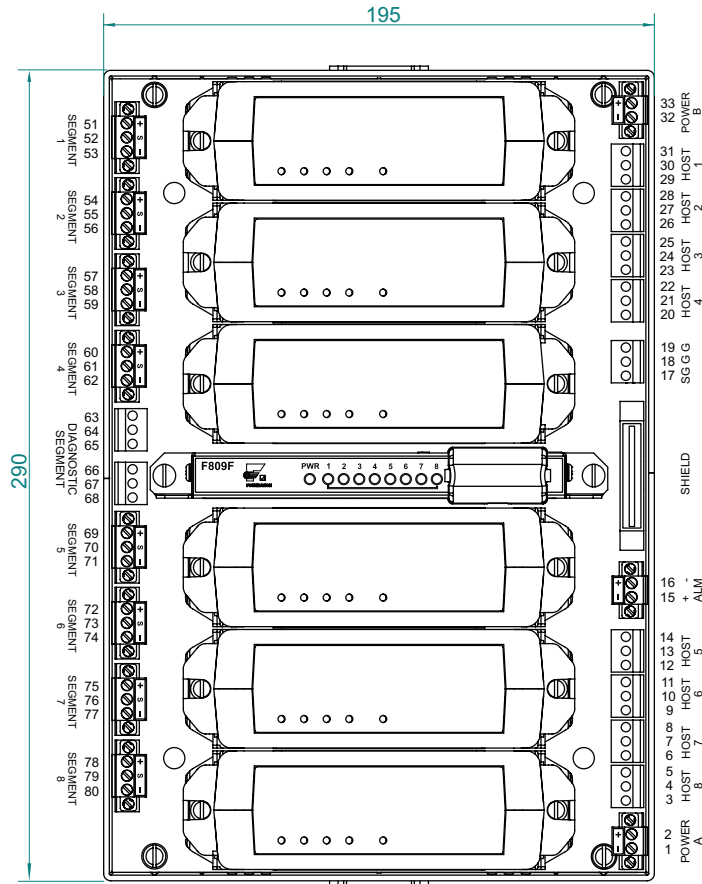

\* This dimension applies if the F809F diagnostic module is not used.

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.



EUROPE (EMEA): +44 (0)1582 723633  
enquiry@mtl-inst.com

THE AMERICAS: +1 800 835 7075  
csinfo@mtl-inst.com

ASIA-PACIFIC: +65 6 645-9888  
sales.mtsing@cooperindustries.com

EPS 9189-FB Rev-2 021211

**APPROVALS** - for the latest certification information visit [www.mtl-inst.com/support/certificates/](http://www.mtl-inst.com/support/certificates/)

Region (Authority)	Standard	Certificate	Approved for	Ratings
(Fieldbus Foundation™)	FF-831	PS079000		Power Supply Type 132
US (FM)	3600, 3611, 3610	Pending	Class I, Div 2, ABCD, T4 Class I, Zone 2, IIC, T4	V <sub>max</sub> = TBA
Canada (FM)	C22.2 No. 213 C22.2 No. 142	Pending	Class I, Div 2, ABCD, T4 Class I, Zone 2, IIC, T4	V <sub>max</sub> = TBA
IECEX (Baseefa)	IEC 60079-0:2004 IEC 60079-15:2005	Pending	Ex nA IIC T4	U <sub>o</sub> = TBA
Europe (MTL)	EN 60079-0:2011 EN 60079-15:2010	Pending	Ex nA IIC T4	U <sub>o</sub> = TBA

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.



EUROPE (EMEA): +44 (0)1582 723633  
enquiry@mtl-inst.com

THE AMERICAS: +1 800 835 7075  
csinfo@mtl-inst.com

ASIA-PACIFIC: +65 6 645-9888  
sales.mtlsing@cooperindustries.com

EPS 9189-FB Rev-2 021211