

# OneWireless Adapter for HART Devices Specifications

Model: OWA 100

34-XY-03-43 June 2011



## Introduction

The Honeywell OneWireless™ Adapter (OWA 100) allows you to easily gain access to the information locked in your wired HART devices and bring it into any ISA100.11a compliant control system. Save time and money by avoiding the cost of installing long runs of cable to your installed HART devices by using the OneWireless Adapter. Improve the monitoring capabilities by automating the collection of information from these remote field devices by just adding the adapter to these 2- or 4-wired HART devices that can either be difficult or cost-prohibitive to reach.

The OneWireless Adapter utilizes the proven radio electronics of the XYR 6000 family of transmitters providing a proven and reliable solution for getting the data wirelessly from any HART device.

The OneWireless Adapter adds to the Honeywell OneWireless and XYR 6000 line of wireless products, allowing you to add wireless communications to almost any measurement point. Using the OWA 100 OneWireless Adapter, customers can obtain data to create information from remote and hazardous measurement locations without the need to run wires, where running wire can be cost prohibitive and/or difficult if the measurement is in a hazardous location. The adapter can be installed on an existing 2- or 4-wired HART device and operational in minutes, quickly providing information back to your control system.

The OneWireless Adapter is part of the Honeywell OneWireless system and is ISA100.11a compliant.

Each OneWireless Adapter can scavenge power from the 4-20ma loop in addition to being battery powered by a long-life "D" size lithium battery. The OWA 100 Adapter's transmission range is 1,000 ft. (305 m) line of site (LOS) under ideal conditions.

The OWA 100 will transmit the HART PV's and diagnostic data over the Honeywell OneWireless network. The four HART PVs can be viewed using a standard internet browser through the Wireless Device Manager's user interface. This interface is the same user interface used for configuring and viewing the entire OneWireless network.

The diagnostic data is passed from the HART transmitter through the OneWireless network. FDM, AMS, or some similar application running on the user's process control system is able to read the HART data from the transmitter wirelessly through the OneWireless network.



Figure 1- OneWireless Adapter (OWA 100)

These applications can also configure the HART device over the network.

The Honeywell OneWireless Network ensures reliable and fast transmission of field information into Experion® PKS or any other control system wirelessly via OPC client or Modbus-TCP

Implement the value of wireless technology today:

- Gain wireless access to HART information
- Measure remote access points simply, safe and securely
- Obtain and utilize previously inaccessible information due to high wiring cost or hazardous locations.
- Easily meet regulatory requirements
- Improve process efficiency
- Increase productivity by eliminating manual field readings of instruments

## Operating Conditions

Parameter	Reference Condition		Rated Condition		Operative Limits		Transportation and Storage	
	°C	°F	°C	°F	°C	°F	°C	°F
Ambient Temperature**	25 ±1	77 ±2	-40 to 85	-40 to 185	-40 to 85	-40 to 185	-40 to 85	-40 to 185
Humidity (%RH)	10 to 55		0 to 100		0 to 100		0 to 100	
Vibration	Maximum of 4g over 15 to 200 Hz							
Shock	Maximum of 40g							
Power	<p>Battery powered 3.6V Lithium thionyl chloride (LiSOCl<sub>2</sub>) battery non-rechargeable, size D            Connected into a powered 4-20 mA loop power supply = 7 to 30 Vdc, 25 mA for power scavenging; maximum loop voltage drop due to adapter is 2.52 Vdc over the ambient temperature range across the loop; minimum loop load resistance is 250 Ohms.</p> <p>Battery life @ reference conditions with 30 second publish cycle time set for non-Routing is 3+ years</p>							

\*\* The ambient limits shown are for ordinary non-hazardous locations only. Refer to the appropriate control drawing, FM/CSA, ATEX, or IECEx for the ambient limits when installed in hazardous locations.

## Physical Specifications



Parameter	Description
Mounting	½" NPT or M20 316 Stainless Steel fitting that allows the adapter to be attached directly to the conduit entry of any 2 or 4-wire HART device (standard options). Mounting should result in the antenna being vertically oriented. An optional Remote Mounting Kit is available.
Housing	Molded Polycarbonate UL rating of f1 for outdoor use, UV stabilized and V-0 rating. Meets Type 4X (hosedown and corrosion resistant), IP 66 (dust-tight/hosedown).
Dimensions	See <a href="#">Figure 5</a>
Net Weight	Approximately 1.0lb/(0.45Kg)

## Specifications


Parameter	Description
Input	Any 2 or 4-wire HART device
Wireless Communication	<p>ISA100.11a Compliant            2,400 to 2,4835 GHz (2.4 GHz) Industrial, Scientific and Medical (ISM) band per FCC 15.247 / IEEE 802.15.4-2006.</p> <p>Every data packet transmitted in either direction is verified (CRC check) and acknowledged by the receiving device.            USA – FCC Certified; Canada – IC Certified; European Union – RTTE/ETSI Conformity</p>
RF Transmitter Power	<p>NA Selection – 125 mW (20.9 dBm) maximum transmit power not including antenna per FCC/IC, or 400 mW (26.0 dBm) maximum EIRP including antenna for USA and Canadian locations            EU Selection – 10 mW (10.0 dBm) maximum EIRP including antenna per RTTE/ETSI for EU locations.</p>
Data	<p>PV Data Publish Cycle Time: Configurable from 5 seconds to 1 minute, (HART PV every 5 seconds minimum)            Rate: 250 Kbps            ISA100.11a Compliant output</p>
Antenna	Integral – 2.5 dBi omnidirectional monopole
Signal Range*	<p>OWA 100 Adapter to FDAP: Nominal 305 m (1,000 feet) with a clear line of sight            Two OWA's both having TX Power set to 14 dBm with a clear line of site nominal signal range is 240 m (790ft.)</p> <p>An XYR 6000 transmitter having TX Power set to 16 dBm and an OWA with TX Power set to 14 dBm with a clear line of site nominal signal range is 170 m (560ft.)</p>

<b>Parameter Routing vs. non-Routing"</b>	Specification - Unit can be set as a Field Routing or non-Field Routing device; the number of routing devices is set by the system manager. Using the device as a routing device will impact battery life, the more messages routed through a device, the greater the impact on battery life.
<b>CE Conformity</b>	These transmitters conform with the protection requirements of European Council Directives: 2004/108/EC, the EMC Directive and 1999/5/EC, the Radio & Telecommunications Directive per EN 300 328, V1.7.1 (2004-11), EN 300 489-1, V1.6.1 (2005-09), EN 300 489-17, V1.2.1 (2002-08), EN 301 893 V1.4.1 and EN 61326-1:2005, Electrical Equipment for Measurement, Control and Laboratory Use – EMC Requirements


\* Actual range can vary depending on site topography.

<b>Hazardous Location Certifications</b>	<p><b>c CSA us - Intrinsic Safety - Entity</b> CL I, II, III, Div 1, GPs A-G; T4 Ta = 85°C; Ex ia IIB; T4; Ex tb IIIC T90°C IP66 Amb Temp: <math>-40^{\circ}\text{C} \leq \text{Ta} \leq +70^{\circ}\text{C}</math>; Encl: Type 4x/ IP46</p> <p><b>c CSA us - Non Incendive -</b> CL I, Div 2, GPs CD; CL II, Div 2, GPs F &amp; G; Suitable for CL III, Div 2; T4; CL I, Zone 2 AEx nA IIB, T4; Amb Temp: <math>-40^{\circ}\text{C} \leq \text{Ta} \leq +85^{\circ}\text{C}</math> Encl: Type 4x/ IP46</p> <p><b>IECEX - DEKRA- Intrinsic Safety</b> Ex ia IIB; T4; Ex tb IIIC T90°C, IP66; Amb Temp: <math>-40^{\circ}\text{C} \leq \text{Ta} \leq +70^{\circ}\text{C}</math>; Encl: IP66</p> <p><b>IECEX -DEKRA- Non Sparking</b> Ex nA IIB T4, Gc; Zone 22, Ex tb IIIC T90°C IP66, Dc; <math>-40^{\circ}\text{C} \leq \text{Ta} \leq +85^{\circ}\text{C}</math>; Encl: IP66</p>
	<p><b>ATEX - DEKRA- Intrinsic Safety</b></p> <p> II 1 G Ex ia IIB T4 ; II 1 D Ex tb IIIC T90°C, IP66 ; Amb Temp: <math>-40^{\circ}\text{C} \leq \text{Ta} \leq +70^{\circ}\text{C}</math> ; Encl: IP66</p> <p><b>ATEX - DEKRA- Non Sparking</b></p> <p> II 3 G Ex nA IIB T4 ; II 3 D Ex tb IIIC T90°C IP66 ; <math>-40^{\circ}\text{C} \leq \text{Ta} \leq +85^{\circ}\text{C}</math> ; Encl: IP66</p>


**Wiring**

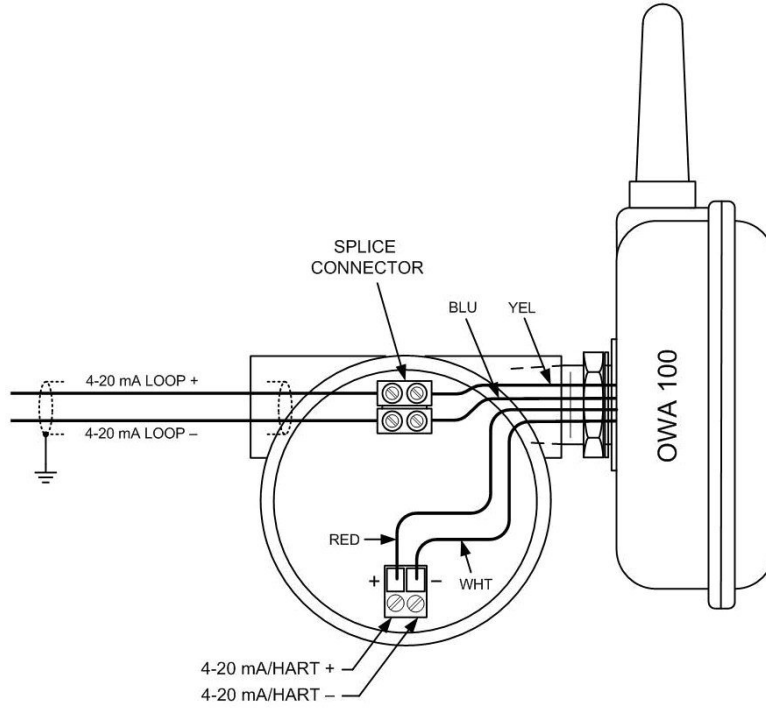

**Figure 2 - OWA 100 – TWO-WIRE CONFIGURATION HART DEVICE**

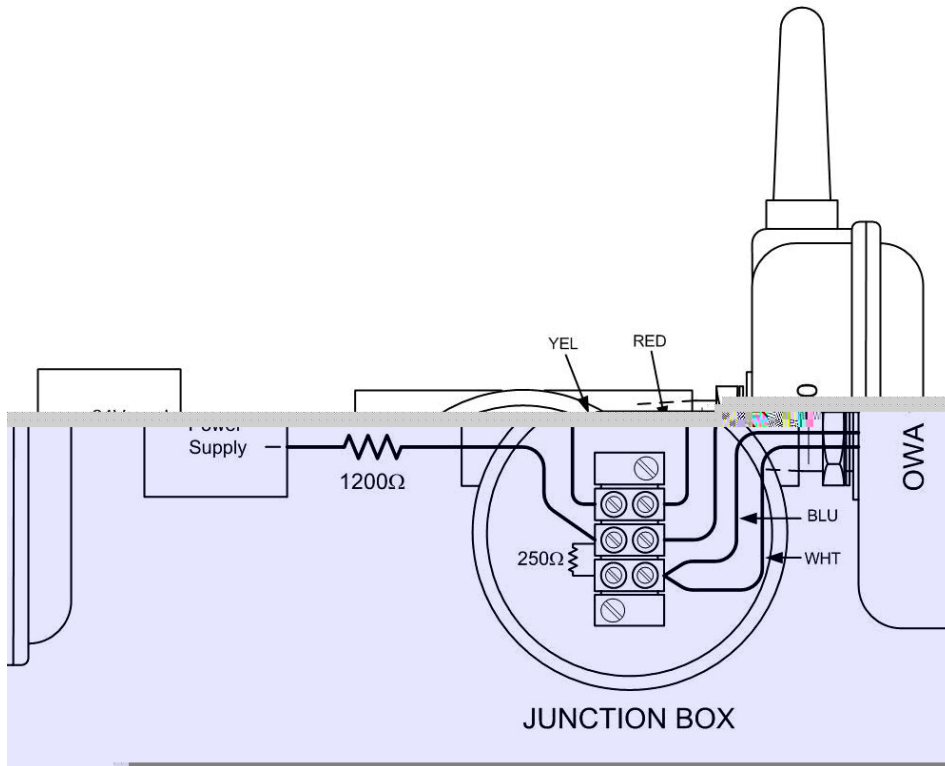


**Figure 3 OWA 100 – AS A ROUTER, NO WIRED DEVICE**

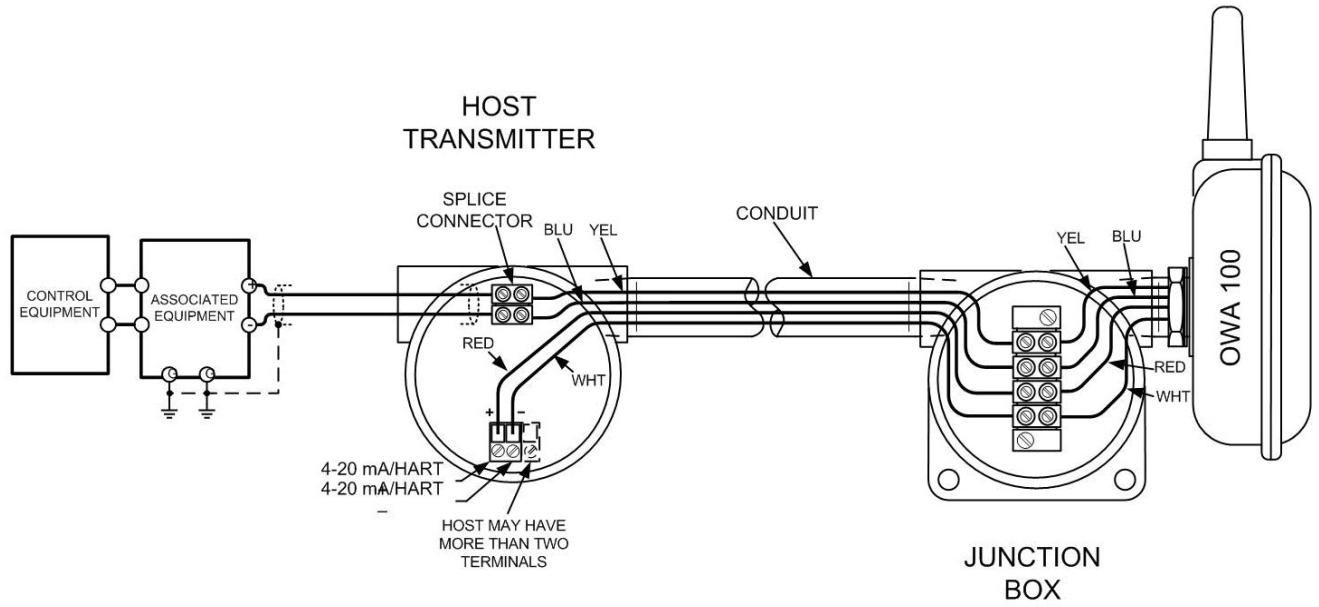

**Figure 4 REMOTE INSTALLATION**

**Dimensions (mm/inches)**

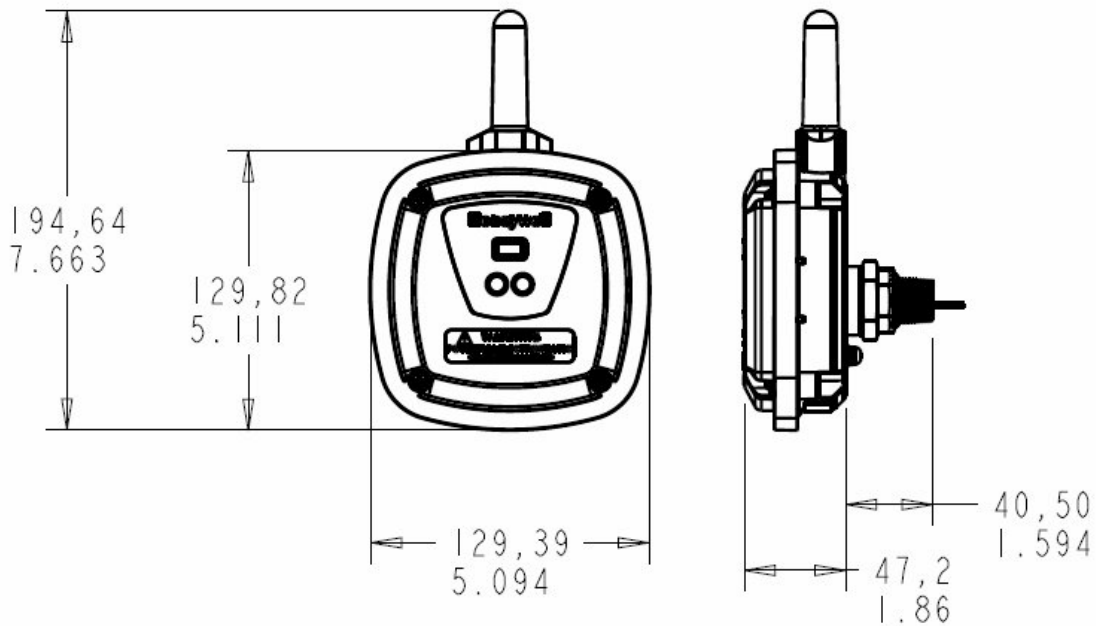

**Figure 5 —Example of typical mounting position**  
 Typical mounting dimensions for reference only

## Sales and Service

For application assistance, current specifications, pricing, or name of the nearest Authorized Distributor, contact one of the offices below.

### Asia Pacific Global Technical Support

**Field Instruments**  
Phone: +65 6580 3156  
Fax: +65 6445-3033

#### Australia

Honeywell Limited  
Phone: +(61) 7-3846 1255  
FAX: +(61) 7-3840 6481  
Toll Free 1300-36-39-36  
Toll Free Fax:  
1300-36-04-70

#### China – PRC - Beijing

Honeywell China Inc.  
Phone: +(86-10) 8458-3280  
Fax: +(86-10) 8458-4650

#### China – PRC - Shanghai

Honeywell China Inc.  
Phone: (86-21) 5257-4568  
Fax: (86-21) 6237-2826

#### China – PRC - Chengdu

Honeywell China Inc.  
Phone: +(86-28) 6613-5078  
Fax: +(86-28) 8678-7061

#### China – PRC - Xi'an

Honeywell China Ltd - Xi'an.  
Phone: +(86-29) 8833-7490  
Fax: +(86-29) 8833-7489

#### China – PRC - Shenzhen-

Honeywell China Inc.  
Phone: +(86) 755-2518-1226  
Fax: +(86) 755-2518-1221

#### Indonesia

PT Honeywell Indonesia  
Phone: +(62) 21-535-8833  
FAX: +(62) 21-5367 1008

#### Honeywell Automation

India Ltd.  
Honeywell Ltd.  
Phone: +(91) 6603-9400  
Fax: +(91) 6603-9600

#### Japan

Honeywell Inc.  
Phone: +(81) 3 6730 7197  
Fax: +(81) 3 6730 7228

#### Malaysia

Honeywell Engineering Sdn Bhd  
Phone: +(603) 7958-4788  
Fax: +(603) 7958-8922

#### New Zealand

Honeywell Limited  
Phone: +(64-9) 623-5050  
Fax: +(64-9) 623-5060  
Toll Free (0800) 202-088

#### Singapore

Honeywell Pte Ltd.  
Phone: +(65) 6580 3278  
Fax: +(65) 6445-3033

#### South Korea

Honeywell Korea Co Ltd  
Phone: +(822) 799 6114  
Fax: +(822) 792 9015

#### Thailand

Honeywell Systems (Thailand) Ltd.  
Phone: +(662) 693-3099  
FAX: +(662) 693-3089

#### Taiwan R.O.C.

Honeywell Taiwan Ltd.  
Phone: +(886-2) 2245-1000  
FAX: +(886-2) 2245-3243

#### SE Asia Countries

see Honeywell Pte Ltd (Singapore)  
for: Philippines, Pakistan, Cambodia, Guam, Laos, Myanmar, Vietnam, East Timor

#### SE Asia Countries

see Honeywell Automation India Ltd for: Bangladesh, Nepal, Sri Lanka

## EUROPE

#### Austria

Honeywell Austria GmbH  
Phone: +43 (316)400123  
FAX: +43 (316)40017

#### Belgium

Honeywell SA/NV  
Phone: +32 (0)2728 24 07  
FAX: +32 (0)2728 22 45

#### Bulgaria

Honeywell EOOD  
Phone: +(359) 2 40 20 900  
FAX: +(359) 2 40 20 990

#### Czech Republic

Honeywell spol. s.r.o.  
Phone: +420 242 442 232  
FAX: +420 242 442 131

#### Denmark

Honeywell A/S  
Phone: +(45) 39 55 55 55  
FAX: +(45) 39 55 55 58

#### Finland

Honeywell OY  
Phone: +358 (0)20752 2753  
FAX: +358 (0) 20752 2751

#### France

Honeywell SA  
Phone: +33 (0)1 60198075  
FAX: +33 (0)1 60198201

#### Germany

Honeywell AG  
Phone: +49 (69)8064-299  
FAX: +49 (69)806497336

#### Hungary

Honeywell Kft.  
Phone: +36-1-451 4300  
FAX: +36-1-451 4343

#### Italy

Honeywell S.p.A.  
Phone: +390292146307  
FAX: +39 0292146377

#### The Netherlands

Honeywell B.V.  
Phone: +31 (0) 20 5656200  
FAX: +31 (0) 20 5656210

#### Norway

Honeywell A/S  
Phone: (45) 39 55 55 55

#### Poland

Honeywell Sp. zo.o  
Phone: +48-22-6060900  
FAX: +48-22-6060901

#### Portugal

Honeywell Portugal Lda  
Phone: +351 21 424 5000  
FAX: +351 21 424 50 99

#### Romania

Honeywell Bucharest  
Phone: +40 (0) 21 2316437  
FAX: +40 (0) 21 2316439

#### Russian Federation (RF),

Honeywell Field Solutions  
Kievskaya str., 7,  
Moscow 121059, Russia  
Phone +7 (495) 796 98 60  
Fax +7 (495) 797 99 64

#### Slovak Republic

Honeywell s.r.o.  
Phone: +421-2-58247 410  
FAX: +421-2-58247 415

#### Spain

Honeywell S.A.  
Phone: +34 (0)91313 61 00  
FAX: +34 (0)91313 61 30

#### Sweden

Honeywell AB  
Phone: +(46) 8 775 55 00  
FAX: +(46) 8 775 56 00

#### Switzerland

Honeywell AG  
Phone: +41 18552448  
FAX: +(41) 1 855 24 45

#### Turkey

Honeywell Turkey A.S.  
Phone: +90 216 578 71 00  
FAX: +90 216 575 66 35

#### Ukraine

Honeywell  
Tel: +380-44-201 44 74  
Fax: +380-44-201-44-75

#### United Kingdom

Honeywell Control Systems Ltd.  
Phone: +44 (0)1344 655251  
FAX: +44 (0) 1344 655554

## MIDDLE EAST

#### Abu Dhabi U A E

Middle East Headquarters  
Honeywell Middle East Ltd.  
Phone: +971 2 4041246  
FAX: +971 2 4432536

#### Sultanate of Oman

Honeywell & Co Oman LLC  
Phone: +968 24 701153/  
Ext.33  
FAX +968 24 787351

#### Saudia Arabia

Honeywell Turki Arabia Ltd  
**Jubail Office**  
Phone: +966-3-341-0140  
Fax: +966-3-341-0216  
Honeywell - ATCO  
**Dammam Office**  
Phone: 0096638304584  
Fax: 0096638338059

#### Kuwait

Honeywell Kuwait KSC  
Phone: +965 242 1327 to 30  
Fax: +965 242 8315  
And  
Phone: +965 326  
2934/1821Fax: +965 326  
1714

## AFRICA

#### Mediterranean & African

**Distributors**  
Honeywell SpA  
Phone: +39 (02) 250 10 604  
FAX: +39 (02) 250 10 659

#### South Africa (Republic of)

and sub saharan  
Honeywell Southern Africa  
Honeywell S.A. Pty. Ltd.  
Phone: +27 11 6958000  
FAX +27 118051504

## NORTH AMERICA

#### Canada

Honeywell LTD  
Phone: 1-800-737-3360  
FAX: 1-800-565-4130

#### USA

**Honeywell Process Solutions,**  
**Phone: 1-800-423-9883**  
**Or 1-800-343-0228**  
**Email: [ask-ssc@honeywell.com](mailto:ask-ssc@honeywell.com)**

## SOUTH AMERICA

#### Argentina

Honeywell S.A.I.C.  
Phone: +(54-11) 4383-3637  
FAX: +(54-11) 4325-6470

#### Brazil

Honeywell do Brasil & Cia  
Phone: +(55-11) 7266-1900  
FAX: +(55-11) 7266-1905

#### Chile

Honeywell Chile, S.A.  
Phone: +(56-2) 233-0688  
FAX: +(56-2) 231-6679

#### Mexico

Honeywell S.A. de C.V.  
Phone: +(52) 55 5259-1966  
FAX: +(52) 55 5570-2985

#### Puerto Rico

Honeywell Inc.  
Phone: +(809) 792-7075  
FAX: +(809) 792-0053

#### Trinidad

Honeywell Inc.  
Phone: +(868) 624-3964  
FAX: +(868) 624-3969

#### Venezuela

Honeywell CA  
Phone: +(58-2) 238-0211  
FAX: +(58-2) 238-3391

*Specifications are subject to change without notice.*

Model Selection Guides are subject to change and are inserted into the specifications as guidance only. Prior to specifying or ordering a model check for the latest revision Model Selection Guides which are published at: <http://hpsweb.honeywell.com/Cultures/en-US/Products/Instrumentation/ProductModelSelectionGuides/default.htm>

**Model Selection Guide (34-XY-16-93)**



Section 13  
Issue 1  
Page 1 of 1


# OneWireless Adapter OWA 100

# Model Selection Guide

Model Selection Guide  
34-XY-16-93 Issue 1

**Instructions**

- Select key number.
- Make one selection from each table, I and II, using the column below the proper arrow.
- A (♦) denotes unrestricted availability. A letter denotes restricted availability.



KEY NUMBER		Availability	
Description	Selection		
OneWireless Adapter	WA100		↓

**Table I Options**

Housing & Electronics Options			
M20 316 SS Conduit Adaptor	1	----	•
1/2" NPT 316 SS Conduit Adapter	2	----	•
Battery Option			
Battery Holder Only - No Battery Included	_ 0	----	•
Battery Power	- 1	----	•
Approvals	Location or Classification (see listing below)		
No approvals	__ 0	----	•
CSA cus, IECEX & ATEX	__ 1	----	•
Factory Mutual	__ 2	----	•
No Selection			
No Selection	___ 0	---	•
Manual Option			
User Manual (CD)	___ C	---	•
User Manual (Paper Copy)	___ P	---	•
Certificate Options			
None	_____ 0	-----	•
Certificate of Conformance (F3391)	_____ 1	-----	•
Certificate of Origin (F0195)	_____ 2	-----	•
Certificate of Origin (F0195) & Conformance (F3391)	_____ 3	-----	•

**Table II - Country Code**

Description		
North America, Canada	A	•
European Union	E	•

**Table III - Factory Use**

Description		
Factory Identification	000	•

RESTRICTIONS				
Restriction Letter	Available Only With		Not Available With	
	Table	Selection	Table	Selection



OneWireless and XYR are trademarks and Experion is a registered trademark of Honeywell International Inc.

**For More Information**

Learn more about how Honeywell's OWA 100 OneWireless Adapter can increase performance, reduce downtime and decrease configuration costs, visit our website [www.honeywell.com/ps/wireless](http://www.honeywell.com/ps/wireless) or contact your Honeywell account manager.

**Honeywell Process Solutions**

1860 West Rose Garden Lane  
Phoenix, Arizona 85027  
Tel: 1-800-423-9883 or 1-800-343-0228  
[www.honeywell.com/ps/hfs](http://www.honeywell.com/ps/hfs)

34-XY-03-43  
June 2011  
© 2011 Honeywell International Inc.

**Honeywell**