

# MTL4576-THC – MTL5576-THC

## TEMPERATURE CONVERTER

mV/THC input, 2-channel

The MTLx576-THC converts low-level dc signals from temperature sensors mounted in a hazardous-area into 4/20mA currents for driving safe-area loads. Software selectable features include linearisation for standard thermocouple types, ranging, monitoring, testing and tagging. Configuration is carried out using a personal computer. The hazardous-area connections include cold-junction compensation and do not need to be ordered separately.

### SPECIFICATION

See also common specification

#### Number of channels

Two

#### Signal source

THC types J, K, T, E, R, S, B or N to BS 60584 and XK mV input

#### Location of signal source

Zone 0, IIC, T4-6 hazardous area  
Division 1, Group A, hazardous location

#### Input signal range

-75 to +75mV

#### Input signal span

3 to 150mV

#### Cold junction compensation

Automatic or selectable

#### Cold junction compensation error

≤ 1.0°C

#### Common mode rejection

120dB for 240V at 50Hz or 60Hz

#### Series mode rejection

40dB for 50Hz or 60Hz

#### Calibration accuracy (at 20°C)

(includes hysteresis, non-linearity and repeatability)

**Input:** ±15µV or ±0.05% of input value  
(whichever is greater)

**Output:** ±16µA

#### Temperature drift (typical)

**Input:** ±0.003% of input value/°C

**Output:** ±0.6µA/°C

#### Safety drive on sensor burnout

Upscale, downscale, or off

#### Output range

4 to 20mA nominal into 300Ω max. (direct or reverse)

#### Maximum lead resistance


300Ω

#### Response time


Configurable - 500 ms default

(Accuracy at 100/200ms - contact MTL)

### MTL4576-THC

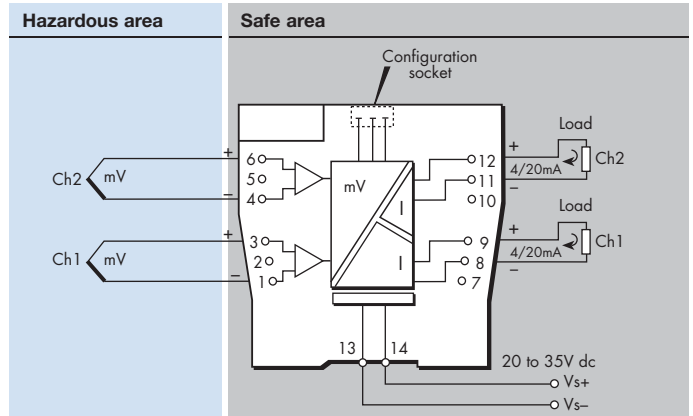

### MTL5576-THC

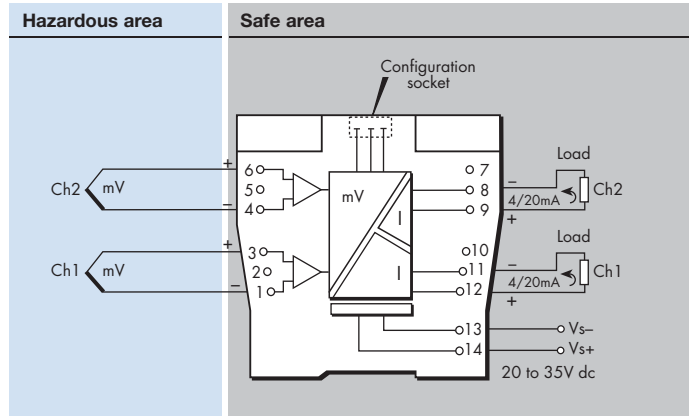

#### LED indicator

Green: power and status indication

Yellow: one provided for channel status

Red: alarm indication

#### Power requirement, Vs with 20mA signal

60mA at 24V

#### Power dissipation within unit with 20mA signal

1.4W at 24V

#### Isolation

Functional isolation channel-channel for safe and hazardous-area circuits.

#### Safety description

Refer to certificate for parameters. Um=253V rms or dc

#### Configurator

A personal computer running MTL PCS45 software with a PCL45USB serial interface.

The given data is only intended as a product description and should not be regarded as a legal warranty of properties or guarantee. In the interest of further technical developments, we reserve the right to make design changes.



EUROPE (EMEA): +44 (0)1582 723633  
enquiry@mtl-inst.com

THE AMERICAS: +1 800 835 7075  
csinfo@mtl-inst.com

ASIA-PACIFIC: +65 6 487 7887  
sales@mtlsing.com.sg

EPSx576T Rev2 080210