



**Chlorine Trifluoride (ClF<sub>3</sub>)**

**9602-7410**

# Chlorine Trifluoride (ClF<sub>3</sub>)

## 9602-7410



**MST Gas Sensors 9602 are only intended for use with the following Honeywell Analytics gas detectors:**



Satellite Series



Sat-Ex



Satellite Portable Gas Detector



Comet

Please refer to the specific gas detector's Operational Manual for further details.

Chlorine Trifluoride ClF <sub>3</sub>	
<b>Sensor Type</b>	ClF <sub>3</sub> Chlorine Trifluoride (without chemical filter)
<b>Part Number</b>	9602-7410
<b>Measuring Principle</b>	Amperometric 3-electrode sensor
<b>Color of Sensor Cap</b>	Black
<b>Specific Sensor Data</b>	Programmed on PROM inside the sensor
<b>Standard Range</b>	0.00 to 1.00ppm
<b>Lower Detectable Limit (LDL)</b>	0.03ppm
<b>Maximum Range</b>	5.00ppm
<b>Sensitivity Decay</b>	< 10% / 6 months
<b>Deviation from Linearity (within Standard Range)</b>	< 10% FS
<b>Zero Current at Normal Conditions</b>	Below LDL
<b>Sensitivity</b>	400 to 800 nA/ppm
<b>Response Time</b>	Constant within standard range
<b>t<sub>50</sub></b>	< 20 s (based on 2 min exposure time)
<b>t<sub>90</sub></b>	< 90 s (based on 2 min exposure time)
<b>Sensor Warm-up Time</b>	5 s
<b>Operating Conditions</b>	-20°C to +40°C; 10% to 95% r.h. non-condensing
<b>Storage Conditions</b>	0°C to +4°C; 40% to 60% r.h. non-condensing
<b>Temperature Dependence</b>	Compensated with microprocessor
<b>Sensor Life Expectancy</b>	≥ 24 months under typical application conditions
<b>Sensor Dimensions</b>	
<b>Height</b>	43mm (1.69")
<b>Diameter</b>	20.5mm (0.80")
<b>Weight</b>	9g (0.31oz)

Note:

All response data given are typical values and related to the sensor being used under normal conditions, i.e. temperature 20°C, r.h. 40-60%, 1013mbar.

# General Specification



As with all electrochemical sensor cells, dramatic output changes in reported concentrations can be expected under rapidly changing environmental conditions. Please ensure sensors are located in areas not prone to sudden changes in humidity and temperature.

Actual readings may be affected by flow rates and absorption on tubing and other gas path surfaces.

All sensors are shipped pre-calibrated to traceable national standards. Dependent on actual operating conditions and overall exposure to gases, checking, calibration or exchange is subject to local regulations or site practices.

## 1. How do electrochemical sensors work?

All Honeywell Analytics electrochemical sensor cells are amperometric type i.e. are fuel cell type acting like batteries, where one component, in order to generate a current, is missing: the gas that should be detected (target gas).

The target gas diffuses through a gas permeable membrane into the sensor where an electrochemical reaction results in a low current that is direct proportional to the measured gas concentration (generally in nA/ppm reading).

## 2. How does the electrochemical sensor work with the detection instrument?


The current is amplified to a signal that is processed through an electronic circuit in order to display the real-time gas concentration.

The zero current of the electrochemical cell is always present and is monitored and suppressed by the electronics.

There are different ways to adjust the correct amplification factor of the electronics. Honeywell Analytics has created the "intelligent sensor" which features a built-in PROM. All relevant sensor data such as sensitivity, target gas, date of first calibration, calibration data, zero current, and alarm levels are programmed onto this chip. Our detectors can read this data and adjust the amplifying factor automatically.

## 3. How does a sensor self-test work?

All relevant sensor data (ref. Pos 2) are programmed onto the PROM inside the electrochemical sensor. Our detectors can read this data. Every 24 hours an automatic sensor self-test is performed, which compares an electronically initiated sensor signal with the stored calibration curve. This makes sure that the sensors are always within specification that is set during the first calibration. If the sensor is out of specification the instrument will indicate that the sensor either needs to be checked or needs to be replaced.

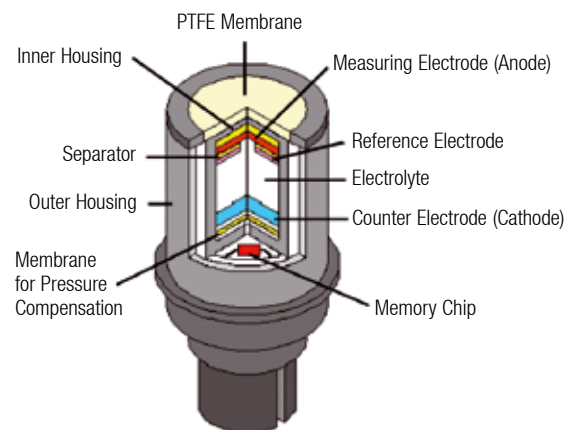

## Cross Sensitivities

Each MST Gas Sensor 9602 is potentially cross sensitive to other gases and this may cause a gas reading when exposed to other gases than those originally designated. The table to the right presents typical readings that will be observed when a new sensor is exposed to the cross sensitive gas (or a mixture of gases containing the cross sensitive species).

Gas / Vapour	Chemical Formula	Concentration Applied (ppm)	Reading (ppm Cl <sub>2</sub> )
<b>Alcohols</b>	n/a	1000	0
<b>Carbon Monoxide</b>	CO	100	0
<b>Chlorine</b>	Cl <sub>2</sub>	1	0.6
<b>Ozone</b>	O <sub>3</sub>	0.25	0.7
<b>Hydrogen</b>	H <sub>2</sub>	3000	0
<b>Hydrogen Sulphide</b>	H <sub>2</sub> S	20	-5

Test Conditions: T=200C, P=1013 hPa, Flow Rate = 30 l/h

Please note that the values stated above are approximate values. Negative values are not displayed on the gas detector's LCD Display, they will be shown as 0.

Notes:

1. Interference factors may differ from sensor to sensor and with life time.
2. This table does not claim to be complete. The sensor might also be sensitive to other gases.
3. It is recommended to use 1-5ppm Cl<sub>2</sub> for cross calibration.
4. It is not advisable to use sensors to detect cross sensitive gases; unless it is advice by our technical department.

# Our Product Range



## Fixed Gas Monitoring

Honeywell Analytics offers a wide range of fixed gas detection solutions for a diverse array of industries and applications including: Commercial properties, industrial applications, semiconductor manufacturers, energy plants and petrochemical sites.

- » Detection of flammable, oxygen and toxic gases (including exotics)
- » Innovative use of 4 core sensing technologies – paper tape, electrochemical cell, catalytic bead and infrared
- » Capability to detect down to Parts Per Billion (ppb) or Percent by Volume (%v/v)
- » Cost effective regulatory compliance solutions

## Portable Gas Monitoring

When it comes to personal protection from gas hazards, Honeywell Analytics has a wide range of reliable solutions ideally suited for use in confined or enclosed spaces.

These include:

- » Detection of flammable, oxygen and toxic gases
- » Single gas personal monitors – worn by the individual
- » Multi-gas portable gas monitors – used for confined space entry and regulatory compliance
- » Multi-gas transportable monitors – used for temporary protection of area during site construction and maintenance activities

## Technical Services

At Honeywell Analytics, we believe in the value of great service and customer care. Our key commitment is providing complete and total customer satisfaction. Here are just a few of the services we can offer:

- » Full technical support
- » Expert team on hand to answer questions and queries
- » Fully equipped workshops to ensure quick turnaround on repairs
- » Comprehensive service engineer network
- » Training on product use and maintenance
- » Mobile calibration service
- » Customised programmes of preventative/corrective maintenance
- » Extended warranties on products

### Find out more

[www.honeywellanalytics.com](http://www.honeywellanalytics.com)

### Contact Honeywell Analytics:

#### Europe, Middle East, Africa, India

Life Safety Distribution AG  
Weiherallee 11a  
CH-8610 Uster  
Switzerland  
Tel: +41 (0)44 943 4300  
Fax: +41 (0)44 943 4398  
[gasdetection@honeywell.com](mailto:gasdetection@honeywell.com)

#### Technical Services

EMEA: [HAexpert@honeywell.com](mailto:HAexpert@honeywell.com)  
US: [ha.us.service@honeywell.com](mailto:ha.us.service@honeywell.com)  
AP: [ha.ap.service@honeywell.com](mailto:ha.ap.service@honeywell.com)

[www.honeywell.com](http://www.honeywell.com)

#### Americas

Honeywell Analytics Inc.  
405 Barclay Blvd.  
Lincolnshire, IL 60069  
USA  
Tel: +1 847 955 8200  
Toll free: +1 800 538 0363  
Fax: +1 847 955 8210  
[detectgas@honeywell.com](mailto:detectgas@honeywell.com)

#### Asia Pacific

Honeywell Analytics Asia Pacific  
#508, Kolon Science Valley (I)  
187-10 Guro-Dong, Guro-Gu  
Seoul, 152-050  
Korea  
Tel: +82 (0)2 2025 0300  
Fax: +82 (0)2 2025 0329  
[analytics.ap@honeywell.com](mailto:analytics.ap@honeywell.com)

#### Please Note:

While every effort has been made to ensure accuracy in this publication, no responsibility can be accepted for errors or omissions. Data may change, as well as legislation, and you are strongly advised to obtain copies of the most recently issued regulations, standards, and guidelines. This publication is not intended to form the basis of a contract.